

YSX056-PE Vet Portable Digital X-ray Unit







- 10.4 inch LCD screen
- 16 preset parameters
- Convenient for doctor



- Light weight
- Easy to move
- Safe with foot brake

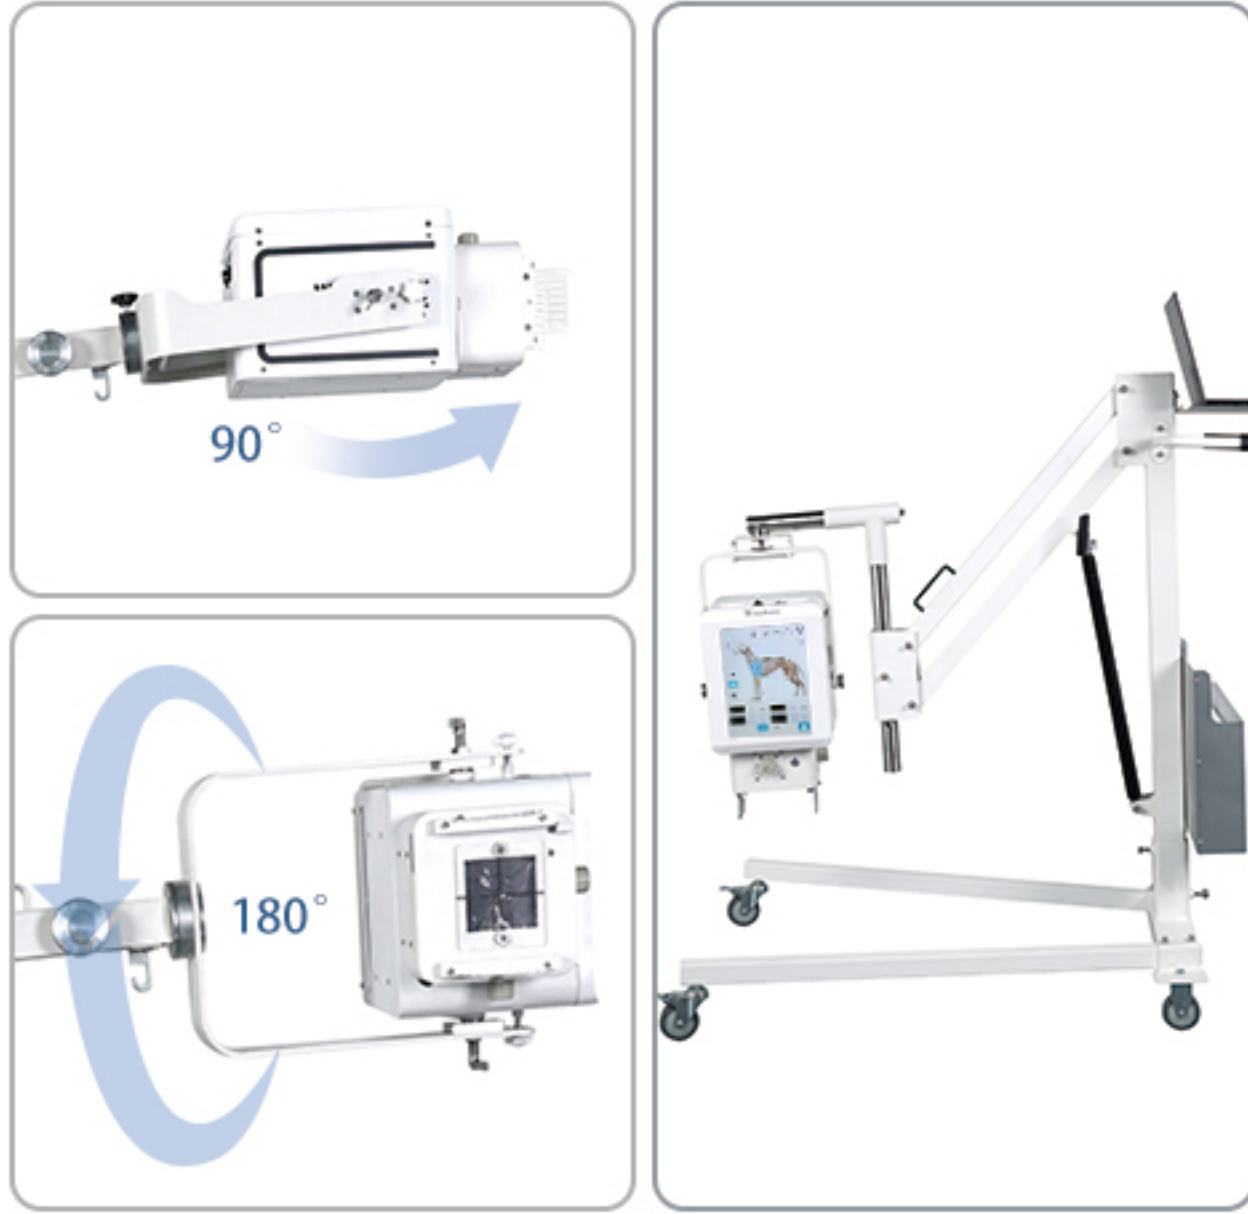

- Flexible tube for various positioning

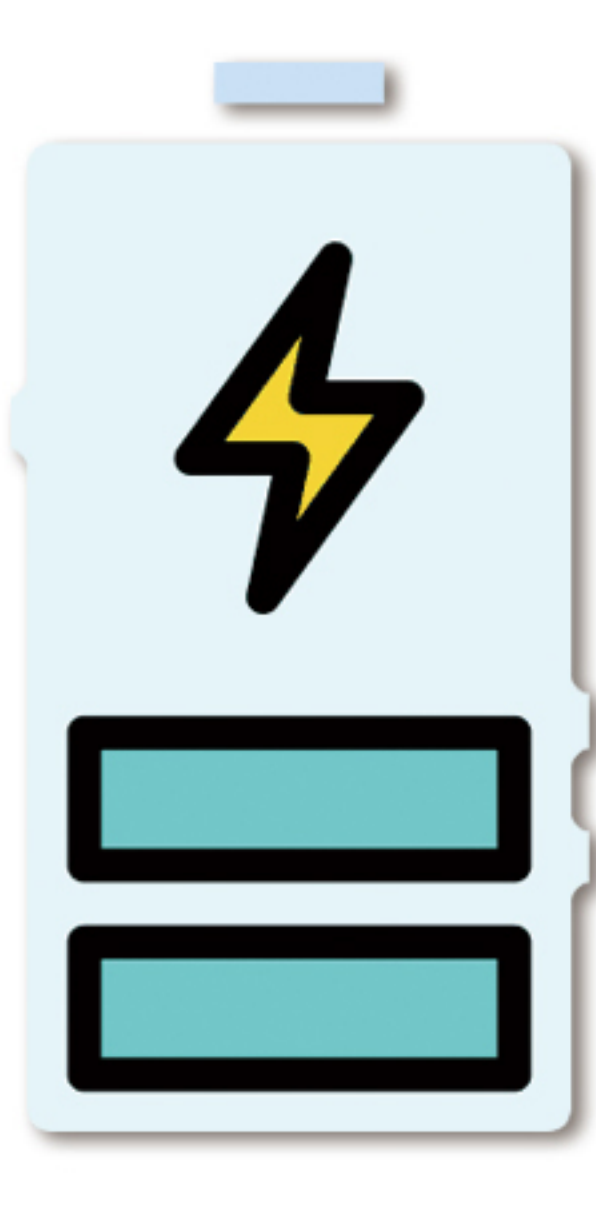

- Optional rechargeable battery, which can take 200 exposures when fully charged.

Parameters

YSX056-PE Vet Portable Digital X-ray Unit	
Model	YSX056-PE VET
Maximum output power	5.6kW
Power supply	AC110/220V±10%, 50/60Hz±1Hz
mA adjustable range	5~100 mA
mAs adjustable range	0.1~320 mAs
kV adjustable range	40kV~125kV
Exposure time	1ms~10000ms
X-ray tube focus	0.6mm/1.8mm
Heat capacity	20KJ
Working frequency	80kHz~200kHz
Flat panel detector	YSFPD-V1717X
Detector size	17*17 inch
Pixel resolution	3072*3072
Pixel pitch	139um
Imaging time	<8s
A/D conversion	16 bits
Spatial resolution	3.6lp/mm
External size	460*460*15mm
Interface	Wired (Wireless can be optional)
Software	Professional veterinary software with multiple languages
Laptop parameter	Intel i5 CPU, 8G memory, 2G card, 128G SSD, PCI-E, R232; 22.5 inch display. Other options are available upon request.

Outstanding Images

